


LOW PIM CABLE MANAGEMENT BRACKET
D-SSPG3206

LOW PIM DOUBLE SIDE CABLE SUPPORT BRACKET FOR RRU AND
ANTENNA'S 6 SNAP IN HOLES

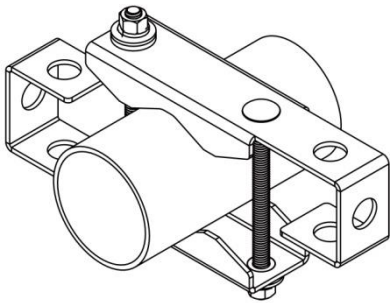

Dimensions

Height	57.15 mm 2.250 in
Length	47.0 mm 1.85 in
Width	266.70 mm 10.50 in
Weight	0.91 kg 2.0 lb

General Specifications

Cable Runs, quantity	Up to 6
Hole Quantity and Size	6 x 0.75"
Material Type	Steel
Finish	Hot Dip Galvanized

Mounting

Mounting Type	Round Member
Mounting Range	60.32 mm to 95.25 mm 2-3/8 in to 3.75 in OD
Torque	15 ft-lbs

Packaging

Package Quantity	1 Kit
------------------	-------

NOTE
Installation of this product should only be performed by trained, qualified and experienced personnel. Installation instructions for this product should be read thoroughly before installation is performed. The manufacturer and supplier of this product disclaims any liability or responsibility for the results of improper or unsafe installation practice.

When installed properly, this product meets the requirements for installation in High Risk PIM Zones. Static and dynamic testing was conducted per IEC 46/666 "Passive RF and Microwave Devices, Intermodulation Level Measurement", "Part 8: Measurement of passive intermodulation generated by objects exposed to RF radiation" and IEC 62037-1.

Material List

- 1) ROSENBERGER BRACKET- **QTY 2**
- 2) 3/8-16 X 5" GALVANIZED CARRIAGE BOLT FOR USE WITH PIPE UP TO 2.5" DIAMETER- **QTY 2**
- 3) 3/8-16 X 6" GALVANIZED CARRIAGE BOLT FOR USE WITH PIPE FROM 2.5" TO 3.75" DIAMETER- **QTY 2**
- 4) 3/8" THREADED ROD INSULATOR- **QTY 2**
- 5) 3/8 USS FLAT WASHER GALVANIZED- **QTY 2**
- 6) 3/8 LOCKWASHER GALVANIZED- **QTY 2**
- 7) 3/8-16 "NC" FINISHED HEX NUT GALVANIZED- **QTY 2**

