


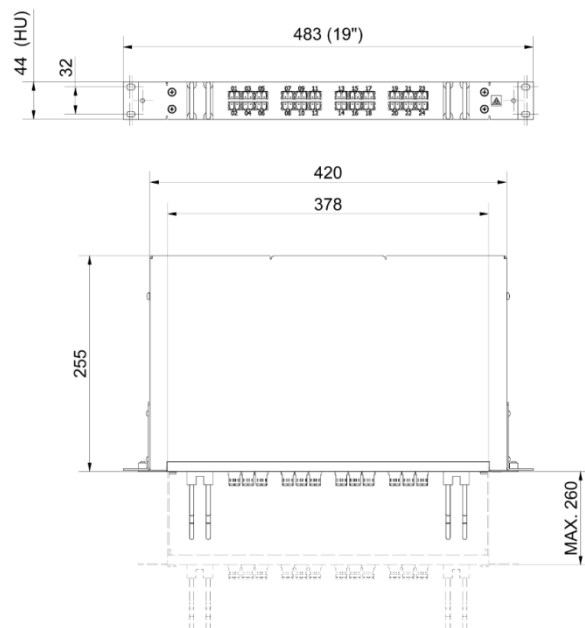

All dimensions are in mm; tolerances according to ISO 2768 m-H

Description

This fibre distribution panel is used for fibre management in 19" racks or cabinets. Ready for all common types of factory or on-site assembled cables. It is especially suitable to accept Rosenberger OSI PreConnect® cabling system. It is able to manage up to 48 fibres. It provides a drawer function for a more convenient fibre handling.

Fiber termination

Capacity 48 fibres
Adapter 24 x LC Duplex single mode (blue)

Parts

Box 19" 1HU	Aluminium natural	1 pce
Cover	Aluminium natural	1 pce
Front plate	Steel powder coated light grey (RAL7035)	1 pce
LC Duplex adapters single mode blue	Plastic	24 pcs
Cable guide for jumper cables	Metal	2 pcs

Technical Data Sheet

FO Patchpanel 19" 1HU 24LCD

FB-SLODF013-024

Cable entry

Any kind of OSI PreConnect[®] cabling system with square distribution interface fits to the entry.
No additional equipment necessary.

Environmental data

Temperature range operation	-40 °C to +80 °C (-40 °F to 176 °F)
Temperature range storage	-40 °C to +80 °C (-40 °F to 176 °F)
Temperature range installation	-10 °C to +65 °C (14 °F to 149 °F)
2002/95/EC (RoHS)	compliant

Packing

Standard:	1 pce in a box
Weight	tbd.

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
U.Albrecht	2013-09-06	P.Maier	2013-09-06	100	13-0004	U.Albrecht	2013-09-06
Corporate Headquarters Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O. Box 1260 D-84526 Tittmoning Germany Tel. +49 8684 18-0				Rosenberger Site Solutions, LLC P.O. Box 4268, Lake Charles, LA 70606 Ph.337.598.5250 Fax: 337.598.5290 rlss@rlss.us www.rlss.us			Page 2 of 2