


STACKABLE PLASTIC SNAP-IN CABLE CLAMP

STACKABLE PLASTIC SNAP-IN CABLE CLAMP FOR NEAR FIELD PIM MITIGATION (KIT OF 10).

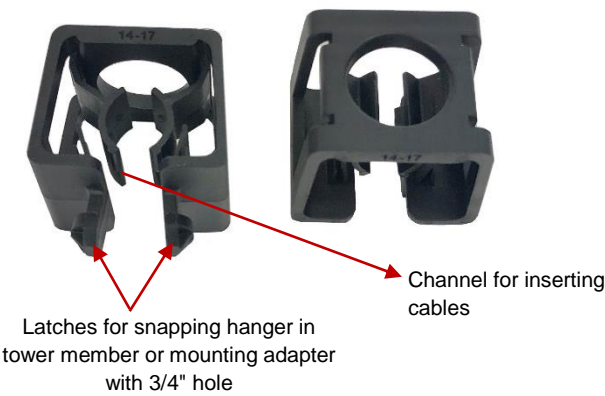

General Specifications

Cable Per Hanger	1
Hanger Type	Snap-in Hanger
Color	Black
Material Type	Engineered Plastic
Maximum Stack Height	3
Mounting	3/4 in Hole

Environmental Specifications

Operating Temperature	-40 °C to +80 °C (-40 °F to +176 °F)
UV Weathering	ISO 4892-3
Vibration	IEC 60068-2-6
Thermal Shock	IEC 60068-2-14
Damp Heat	IEC 60068-2-30

Packaging

Package Quantity	10 pcs
------------------	--------

Part Number	Suitable Cable Diameter	Maximum Stack Height
TH390-SH47	4.0 mm to 7.0 mm	Three (3)
TH391-SH710	7.10 mm to 10.0 mm	Three (3)
TH392-SH1014	10.10 mm to 14.0 mm	Three (3)
TH393-SH1416	14.10 mm to 16.0 mm	Three (3)

When installed properly, this product meets the requirements for installation in High Risk PIM Zones. Static and dynamic testing was conducted per IEC 46/666 "Passive RF and Microwave Devices, Intermodulation Level Measurement", "Part 8: Measurement of passive intermodulation generated by objects exposed to RF radiation" and IEC 62037-1.

NOTE
Installation of this product should only be performed by trained, qualified and experienced personnel. Installation instructions for this product should be read thoroughly before installation is performed. The manufacturer and supplier of this product disclaims any liability or responsibility for the results of improper or unsafe installation practice.

STACKABLE PLASTIC SNAP-IN CABLE CLAMP

STACKABLE PLASTIC SNAP-IN CABLE CLAMP FOR NEAR FIELD PIM MITIGATION.

General Instructions



The Stackable Plastic Snap-in cable clamp has a circular support channel to engage the cable.



Channel for inserting cables


Latches for snapping hanger in tower member or mounting adapter with 3/4" hole



STEP 1

Press cable clamp onto cable until cable centers in channel.

Push cable into the channel with finger or thumb while expanding hanger latches.

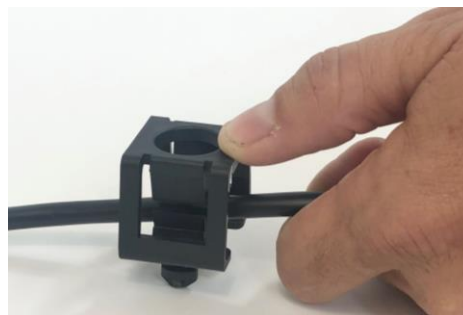

STEP 2

Cable should be centered in channel area and pressed in place.



STEP 3

Push cable clamp in tower member or mounting adapter with 3/4" hole. Snap the latches in place.

When installing in High Risk PIM Zones, ensure the stand-off is PIM mitigation approved.



STEP 4

These cable clamps may be snapped into any other metal hangers or cable clamps.

Metal snap-in hangers are not allowed in High Risk PIM Zones.

Part Number	Suitable Cable Diameter	Maximum Stack Height
TH390-SH47	4.0 mm to 7.0 mm	Three (3)
TH391-SH710	7.10 mm to 10.0 mm	Three (3)
TH392-SH1014	10.10 mm to 14.0 mm	Three (3)
TH393-SH1416	14.10 mm to 16.0 mm	Three (3)

WARNING:

- This product is to be used for horizontal cable management and cable organization between devices such as RRUs and antennas on the top of towers and rooftops only. It is not to be used for vertical cable runs up the tower unless specified.
- Removal requires pressing together of the mounting ears either by hand or proper pliers. Prying out the hanger with a screwdriver or other tool should not be attempted.

Corporate Headquarters

Rosenberger Hochfrequenztechnik GmbH & Co. KG
P.O. Box 1260 D-84526 Tittmoning Germany

Rosenberger Site Solutions, LLC

102 Dupont Dr.
Lake Charles, LA 70607

Phone: (337)598-5250

Fax: (337) 598-5290

Web: www.RosenbergerOnline.us

Version 032320

Page 1 of 1