
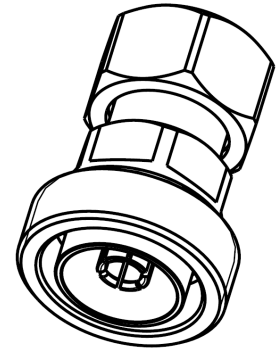


4.3-10

Adaptor
4.3-10 plug – 7/16 jack

60K164-S00N1

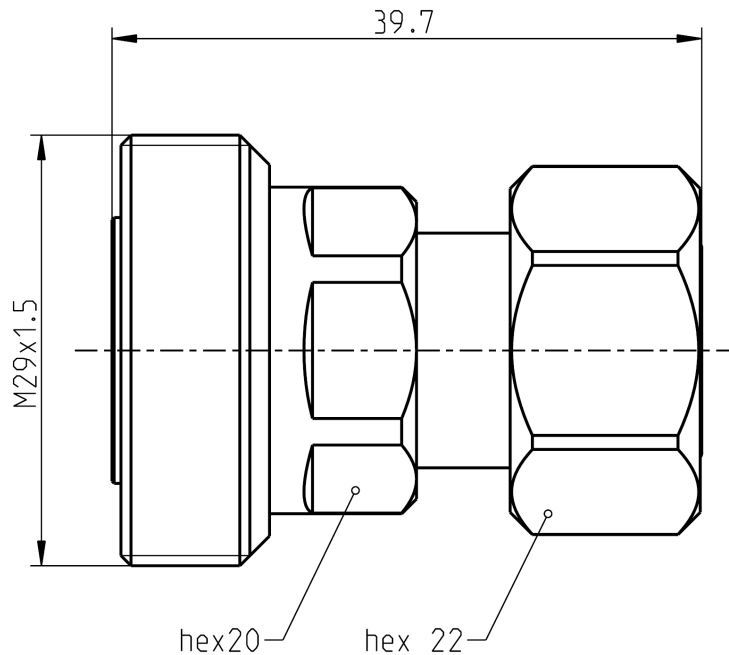

All dimensions are in mm; tolerances according to ISO 2768 m-H

Interface

According to 4.3-10 side: IEC 61169-54
7/16 side: IEC 60169-4, VG 95250, EN 122190, DIN 47223

Documents

Assembly instruction N/A

Material and plating

Connector parts

Center contact	4.3-10 side:	Brass
Center contact	7/16 side:	CuBe
Outer contact		Brass
Body		Brass
Dielectric		PTFE
Gasket		Silicone

Plating

Silver, 3-6 µm
Silver, 3-6 µm
Flash white bronze over silver(e.g. Optargen®)
Flash white bronze over silver(e.g. Optargen®)

Technical Data Sheet

4.3-10

Adaptor
4.3-10 plug – 7/16 jack

60K164-S00N1

Electrical data

Impedance	50 Ω
Frequency	DC to 8.3 GHz
Return loss	≥ 36 dB @ DC to 4 GHz ≥ 32 dB @ 4 GHz to 6 GHz
Insertion loss	≤ 0.1 x $\sqrt{f \text{ [GHz]}}$ dB
Insulation resistance	≥ 5 GΩ
Center contact resistance	≤ 1.0 mΩ, 4.3-10 side ≤ 0.4 mΩ, 7/16 side
Outer contact resistance	≤ 1.0 mΩ, 4.3-10 side ≤ 1.5 mΩ, 7/16 side
Test voltage	2500 V rms
Working voltage	500 V rms
RF-leakage	≥ 120 dB @ DC to 6 GHz
Power handling (at 90 °C, altitude 3000m)	500 W @ 2.0 GHz
Intermodulation (3 rd order)	≥ 160 dBc (2 x 46 dBm) @ 0.4 – 4.0 GHz ≥ 166 dBc (2 x 43 dBm) @ 0.4 – 4.0 GHz

- RL value only valid for the interface -

Mechanical data

	4.3-10 side	7/16 side
Mating cycles	≥ 100	min. 500
Center contact captivation: axial	≥ 30 N	≥ 200 N
radial	> 5 Ncm	≥ 2 Ncm
Center contact retention force	1.5 - 20 N	
Recommended torque	5 Nm	25 to 30 Nm

Environmental data

Temperature range	-55 °C to +90 °C operating temperature
Thermal shock	IEC 60169-1, Sub-clause 16.4
Corrosion resistance	ISO 21207 method B
Vibration	IEC 61169-1 9.3.3 and IEC 60068-2-64
Shock	IEC 61169-1 9.3.14
Degree of protection (mated pair)	IEC 60529, IP68 1h / 25m
RoHS	compliant

Tooling

N/A

Suitable cables

N/A

Weight

Weight	75.5 g/pce
--------	------------

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
F. Fraunhofer	04.02.13	F. Fraunhofer	15.10.14	a00	14-s357	Tobias Stadler	15.10.14

Corporate Headquarters
Rosenberger Hochfrequenztechnik GmbH & Co. KG
P.O. Box 1260 D-84526 Tittmoning Germany
Tel. +49 8684 18-0

Rosenberger Site Solutions, LLC
P.O. Box 4268, Lake Charles, LA 70606
Ph.337.598.5250 Fax: 337.598.5290 rlss@rlss.us
www.rlss.us