


7/16 SURGE ARRESTER
BULKHEAD JACK - PLUG

60HK566-S00N1

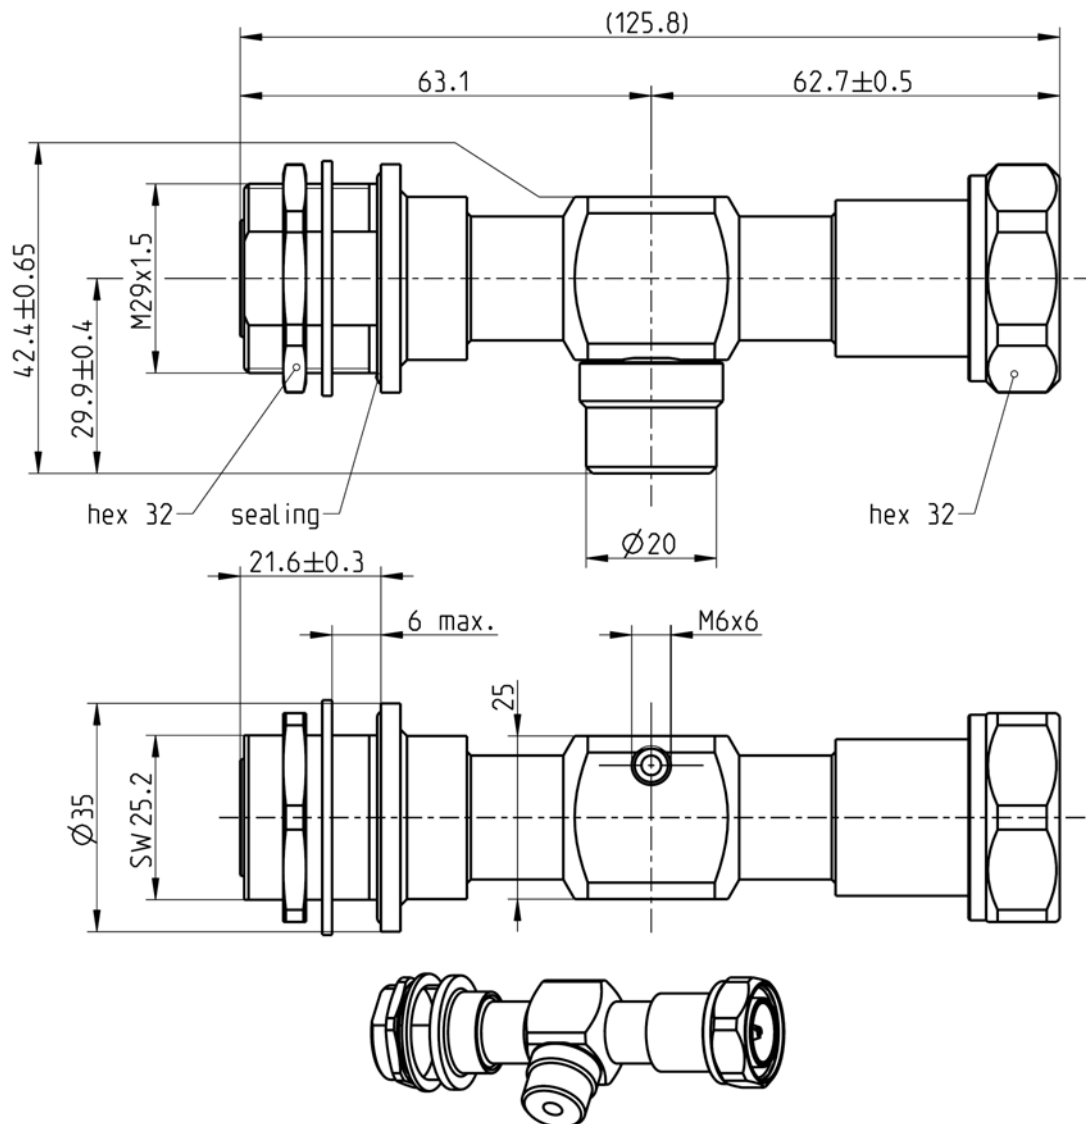

All dimensions are in mm; tolerances according to ISO 2768 m-H

Interface

According to IEC 60169-4, VG 95250, EN 122190, DIN 47223

Documents

Panel piercing B 75
Assembly instruction 53_MV-A001

Material and plating

Connector parts

Center contact female side
Center contact male side
Outer contact
Body
Dielectric PTFE
Gasket Silicone

Material

Spring bronze
Brass
Brass
Brass

Plating

Silver, 3-6 µm
Silver, 3-6 µm
Flash white bronze over silver(e.g. Optargen®)
Flash white bronze over silver(e.g. Optargen®)

7/16

**SURGE ARRESTER
BULKHEAD JACK - PLUG**
60HK566-S00N1
Electrical data

Impedance 50	Ω
Operating frequency	698 to 2700 MHz
Return Loss	≥ 26 dB
Insertion Loss	≤ 0.1 dB
Center contact resistance	< 0.4 m Ω
Outer contact resistance	< 1.5 m Ω
RF-leakage	< -128 dB @1 GHz
Intermodulation (3 rd Order)	< -115 dBm @ 2 x 20 W
Power handling (at 20 °C, sea level, VSWR 1.0)	1500W
DC pass	-
AISG -	
Nominal impulse discharge current	50 kA (8/20 μ s)
Residual voltage	< 130 V (20kA, 8/20 μ s) < 15 V (4kV 1.2/50 μ s, 2kA 8/20 μ s)
Residual energy	< 25 μ J (4kV 1.2/50 μ s, 2kA 8/20 μ s)

Mechanical data

Mating cycles	min. 500
Coupling nut retention	≥ 1000 N
Center contact captivation: axial	≥ 200 N
radial	≥ 2 Ncm
Coupling torque (recommended)	25 to 30 Nm
Proof torque	max. 35 Nm

Environmental data

Temperature range	-45°C to +85°C
Rapid change of temperature	IEC 60068-2-14 Test Na
Corrosion salt mist	IEC 60068-2-11 Test Ka
Vibration	IEC 60068-2-6 Test Fc
Shock	IEC 60068-2-27 Test Ea
Climatic class	IEC 60068-1 (45/85/56)
Cold	IEC 60068-2-1 Test A
Dry heat	IEC 60068-2-2 Test B
Damp heat (steady state)	IEC 60068-2-3 Test Ca
Degree of protection (mated pair)	IEC 60529, IP68 2.5 bar, mated condition
2002/95/EC (RoHS)	compliant

Packing

Standard	1 pce in box
Weight tbd	g

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
Hauke Schütt	03/03/10	H.Schütt	05/03/10	100	10-e038	Nobis A.	05.03.2010

Rosenberger Hochfrequenztechnik GmbH & Co. KG
 P.O.Box 1260 D-84526 Tittmoning Germany
www.rosenberger.de

Tel.: +49 8684 18-0 Page
 Fax: +49 8684 18-499
 email: info@rosenberger.de

2 / 2