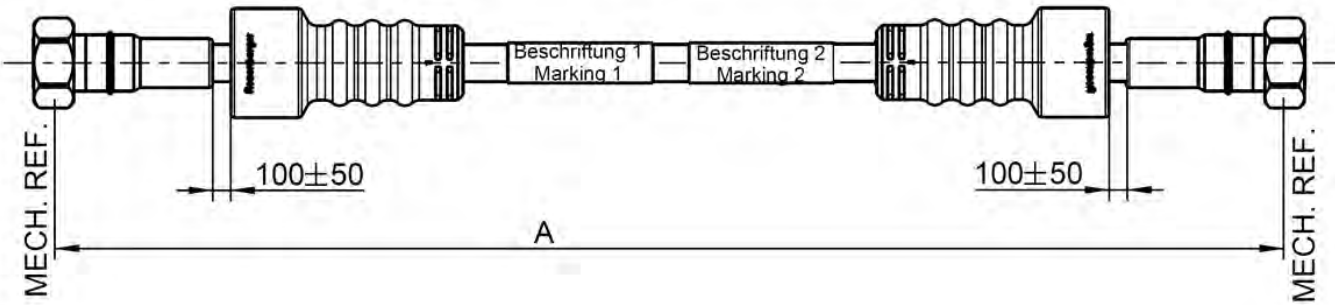


RF_35/05.10/6.0
Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co. KG

Technical Data Sheet		Rosenberger
3/8" JUMPER	4.3-10 MALE – 4.3-10 MALE	SLJ38SPW-64M64M-X-00
		
Function description		
This part is a coaxial cable assembly for telecommunication equipment. It consists of 3/8" super flexible coaxial cable with PE jacket and two 4.3-10 male connectors. The assembly is waterproof in mated condition and UV protected.		
Available variants		
The assembly is available in lengths from 0.5 m to 10 m in intervals of 0.5 m. Different feet length are available on request.		
Assembly parts		
Connector	4.3-10 male (screw-type) connectors plated with white bronze	
Cable	3/8" super flexible, PE jacket	
Marking 1	Direct print onto the cable or one wrapping label Marking includes manufacturer, part nr. & batch no.	
Marking 2	Direct print onto the cable or on wrapping label Marking includes "Rosenberger factory made" Position in the middle of the cable	
Bend protection	molding material TPE compound	
Corporate Headquarters Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O. Box 1260 D-84526 Tittmoning Germany Tel. +49 8684 18-0		Rosenberger Site Solutions, LLC P.O. Box 4268, Lake Charles, LA 70606 Ph.337.598.5250 Fax: 337.598.5290 rlss@rlss.us www.RosenbergerOnline.us
		Page 1 of 2

Technical Data Sheet

Rosenberger

3/8"
JUMPER

4.3-10 MALE – 4.3-10 MALE

SLJ38SPW-64M64M-X-00

Electrical data

Impedance	50 Ω
Frequency	DC to 2.7 GHz
Return loss	
DC – 1 GHz	≥ 32 dB
1 – 2.2 GHz	≥ 30 dB
2.2 – 2.7 GHz	≥ 28 dB
Insertion loss typ.	
DC – 1 GHz	≤ 0.14 dB/m (cable) + 0.01 dB * $\sqrt{f}$ (GHz)
1 – 2.2 GHz	≤ 0.21 dB/m (cable) + 0.01 dB * $\sqrt{f}$ (GHz)
2.2 – 2.7 GHz	≤ 0.24 dB/m (cable) + 0.01 dB * $\sqrt{f}$ (GHz)
Intermodulation (3rd order @ 2 x 20 W)	typ. max.
	≤ -120 dBm ≤ -117 dBm
Relative Velocity of Propagation	82 %
DC Breakdown Voltage	2000V

Mechanical data

Coupling torque (recommended)	5 to 8 Nm
Spanner flat on coupling nut	22 mm
Cable diameter, jacket	10.2 mm typ.
Tensile strength	500 N
Recommended hanger spacing	0.6 m
Minimum bend radius single	13 mm*
Minimum bend radius repeated	25 mm*
*Bending starts behind connector incl. kink protection	

Environmental data

Operation temperature range	-30 °C to +80 °C
Installation temperature range	-25 °C to +60 °C
Degree of protection	IEC 60529, IP68 1 bar for 1 h (mated)
RoHS	compliant

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
Chr. Janßen	28.03.2018	Weidenspöckner	28.03.2018	100	18-0005	Chr. Janßen	28.3.2018
Corporate Headquarters Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O. Box 1260 D-84526 Tittmoning Germany Tel. +49 8684 18-0				Rosenberger Site Solutions, LLC P.O. Box 4268, Lake Charles, LA 70606 Ph.337.598.5250 Fax: 337.598.5290 rlss@rlss.us www.RosenbergerOnline.us			Page 2 of 2