

Double Clamp  
TH497-DC158

Dpuble Clamp to suit 1-5/8" Coaxial Cable.  
Sold in Kits of 10



Dimensions

Nominal Size	1-5/8"
Maximum Cable Diameter	50.50 mm   1.988 in
Minimum Cable Diameter	46.500 mm   1.831 in
Height	66.675 mm   2.625 in
Length	133.35 mm   5.25 in
Width	41.275 mm   1.625 in

General Specifications

Hanger Type	Double Block
Cable Per Hanger	2
Color	Black
Material Type	Engineered Plastic
Certification / Compliance	ISO 9001: 2008 / TL9000-V R5.0/R4.5
Maximum Stack Height	3

Packaging

Package Quantity	10 pcs
------------------	--------

When installed properly, this product meets the requirements for installation in High Risk PIM Zones. Static and dynamic testing was conducted per IEC 46/666 “Passive RF and Microwave Devices, Intermodulation Level Measurement”, “Part 8: Measurement of passive intermodulation generated by objects exposed to RF radiation” and IEC 62037-1.

## TH Series Double Clamps

This general installation instruction applies to all Rosenberger TH series Double Clamps.



## Typical Application


**Material List:** Each kit includes 10 sets of Double Clamp Support Blocks

**Required Tools:** (2) 9/16" Wrenches

Recommended Torque: 8 ft-lbs | 11 Nm

Maximum Torque: 10 ft-lbs | 14 Nm

**\*\*Maximum Stack Height: 3**

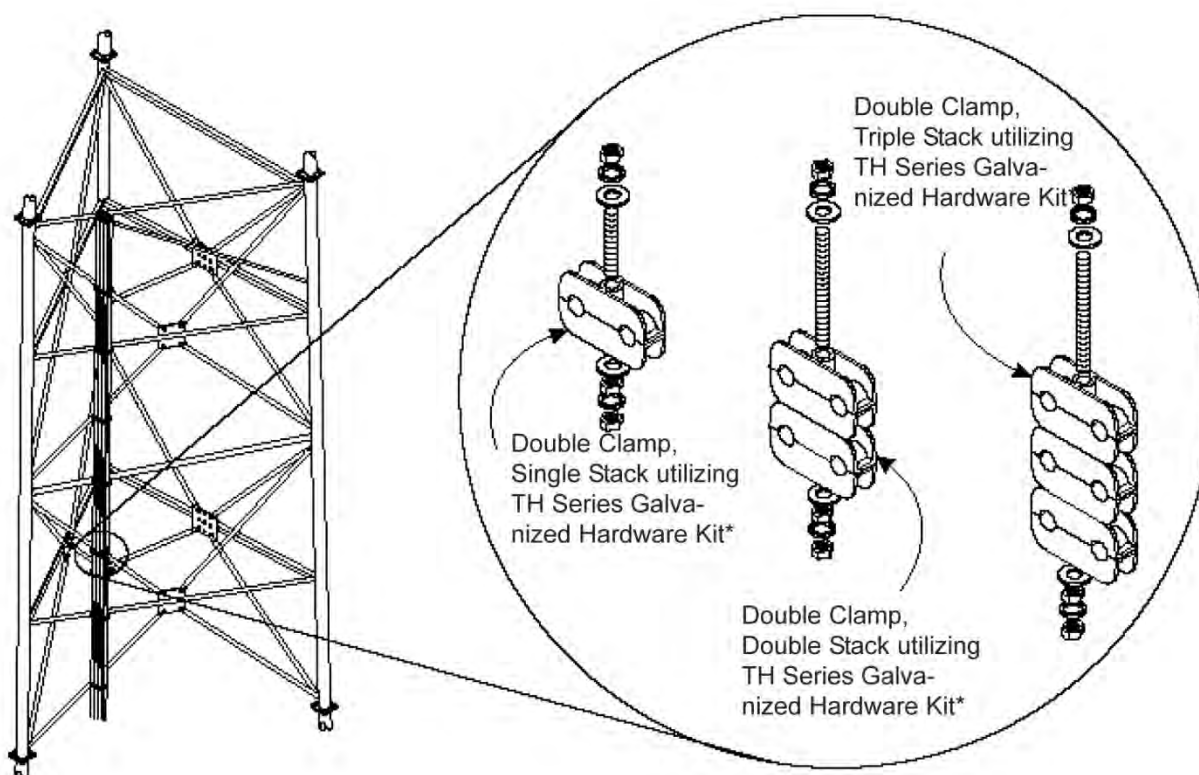

Part #	Description	QTY
TH494-DC12	Double Clamp to suit 1/2" Corrugated Cable	10
TH495-DC78	Double Clamp to suit 7/8" Corrugated Cable	10
TH496-DC114	Double Clamp to suit 1-1/4" Corrugated Cable	10
TH497-DC158	Double Clamp to suit 1-5/8" Corrugated Cable	10
TH498-DC214	Double Clamp to suit 2-1/4" Corrugated Cable	10
TH499-DC38	Double Clamp to suit 3/8" Corrugated Cable	10



When installed properly, this product meets the requirements for installation in High Risk PIM Zones. Static and dynamic testing was conducted per IEC 46/666 "Passive RF and Microwave Devices, Intermodulation Level Measurement", "Part 8: Measurement of passive intermodulation generated by objects exposed to RF radiation" and IEC 62037-1.

### Corporate Headquarters

Rosenberger Hochfrequenztechnik GmbH & Co. KG  
P.O. Box 1260 D-84526 Tittmoning Germany

### Rosenberger Site Solutions, LLC

102 Dupont Dr.  
Lake Charles, LA 70607

Phone: (337)598-5250

Fax: (337) 598-5290

Web: [www.RosenbergerOnline.us](http://www.RosenbergerOnline.us)

Version 112718

Page 1 of 1