


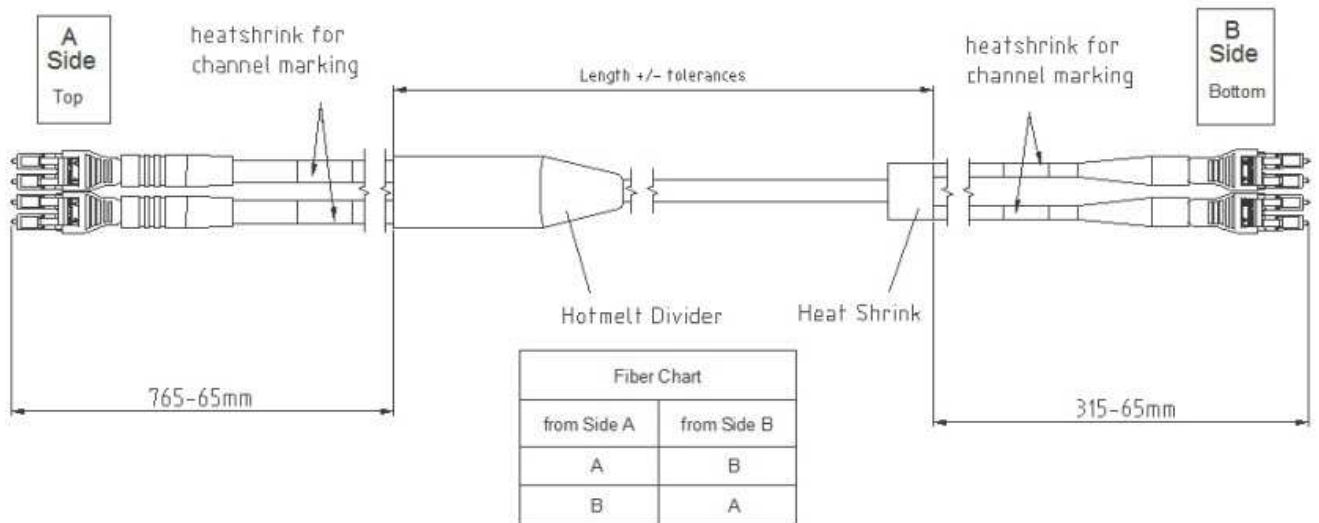

All dimensions are in mm; tolerances according to ISO 2768 m-H

Description

This 4 fiber optic jumper cable assembly connects remote radio heads (RRU) in telecommunication applications. Each side of the jumper cable assembly is equipped with 2 LC-Compact connectors. The connectors on top end (A Side) are overmolded, the connectors on bottom end (B side) comes with standard boots.

Divider on top end (A Side) is made in hotmelt technology and especially designed for solid straight connections. Divider at bottom end (B side) is done with a heat shrink.

The top end (A Side) is using 7mm fan-outs, the bottom end (B side) is using 2.9mm fan-out.

This assembly could be used indoor and outdoor. The cable is UV protected and flame retardant.

Available Variants

Type	Length (mm)	Length (feet)	weight (g) / pce
L98B-088-18300	18300±1000	60	1248
L98B-088-24400	24400±1500	80	1577
L98B-088-30500	30500±1500	100	2715
L98B-088-36500	36500±1500	120	3044
L98B-088-42600	42600±1500	140	3373
L98B-088-48700	48700±1500	160	3702

Cable assemblies in additional length variants are available.

Parts

Connector top	2 x LC-Compact, single mode, Black boot (molded)
Connector bottom	2 x LC-Compact, single mode, Blue boot
Cable	Flame retardant PVC acc. to IEC 60332-1

Technical Data Sheet


Rosenberger
Rosenberger Site Solutions, LLC

FTTA Fiber Cable Assembly
2xLCC – 9uG657 – 2xLCC


FB-L98B-088-XXX

Optical data

Cable	4 fibres	
Fiber	9/125 µm single mode optical fibre according to ITU-T G.657A 1	
Attenuation Coefficient	≤ 0.40 dB / km ≤ 0.25 dB / km	λ = 1310 nm λ = 1550 nm
Connector	LC-Compact	
Insertion loss	typ. 0.10 dB max. 0.30 dB	
Return loss	typ. 50 dB (UPC)	
A Side		
Bending radius min. at boot	60mm	



The diagram illustrates a 90-degree bend in a cable. A horizontal line representing the cable enters from the left and transitions into a quarter-circle arc. A dimension line with arrows indicates the radius of this arc is 60mm. After the arc, the cable continues as a horizontal line. A vertical dimension line with arrows indicates the offset distance from the original horizontal path to the end of the arc is 7mm.



Mechanical data

Cable diameter, jacket	7 mm
Cable diameter fanout A	7 mm
Cable diameter fanout B	2.9 mm
Fiber marking:	coloured heat shrink
Channel 1:	blue heat shrink
Channel 2:	orange heat shrink

Minimum bending radius cable

Installation	105 mm
Operation	70 mm

Max. tensile strength cable

Installation	1200 N
Permanent	600 N

Crush resistance

Short term	2200 N / dm
Long term	800 N / dm

Impact resistance acc. to IEC 60794-1-2, method E4

3 Impacts	1.5 Nm
-----------	--------

Environmental data

Temperature range operation	-40 °C to +85 °C
Temperature range storage	-55 °C to +85 °C
Temperature range installation	-20 °C to +60 °C
2002/95/EC (RoHS)	compliant
UV resistance	acc. to IEC60068-2-5
Good resistance to oil, petrol and leach.	

Packing

Standard	
Length < 30 m	tbd
Length ≥ 30 m	tbd

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
S.Schlomka	29/07/13	S.Gleich	29/07/13	200	13-0003	D.Eisenhut	14/11/13
Corporate Headquarters Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O. Box 1260 D-84526 Tittmoning Germany Tel. +49 8684 18-0				Rosenberger Site Solutions, LLC P.O. Box 4268, Lake Charles, LA 70606 Ph.337.598.5250 Fax: 337.598.5290 rlss@rlss.us www.rlss.us			Page 2 of 2